



INSTALLATION INSTRUCTIONS

Accessory
DOOR EDGE GUARDS


Application
2010 CR-V

Publications No.
All 42598


Issue Date
AUG 2009

PARTS LIST


Right front door edge guard




Left front door edge guard




Right rear door edge guard



Left rear door edge guard



Seam sealant cutting tool



TOOLS AND SUPPLIES REQUIRED

Rubber mallet

Felt-tip pen

Touch-up paint

INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE: These instructions show the right door edge guard being installed. The same procedure applies to installing the left door edge guard.

1. Clean and wax the areas to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.



Front Door Edge Guards

3. Position the door edge guard against the inside edge of the front door, using the bends for reference. Mark the sealant at the top and bottom ends of the door edge guard.

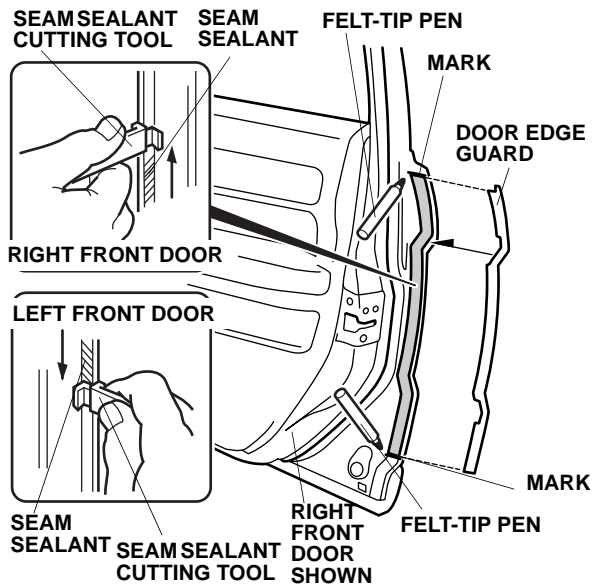

4. Position the cutting edge of the seam sealant cutting tool against the door edge, and trim the seam sealant from mark to mark.
NOTE: The cutting tool only cuts in one direction. Move it upward on the right side, and downward on the left side of the vehicle.
5. Apply touch-up paint to the cut seam sealant area, and let it dry.


6. Position the door edge guard on the door edge, and tap it into position with a series of light taps using a rubber mallet.

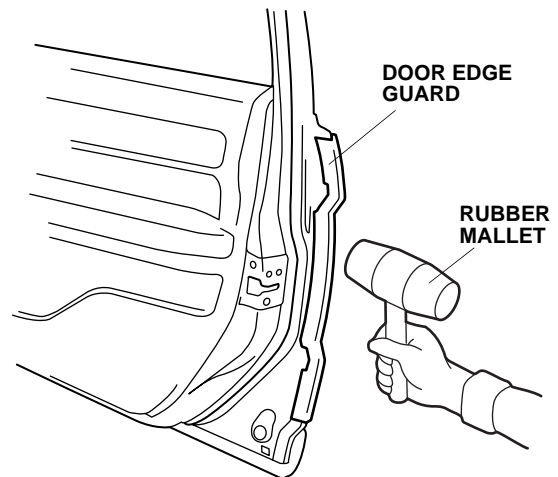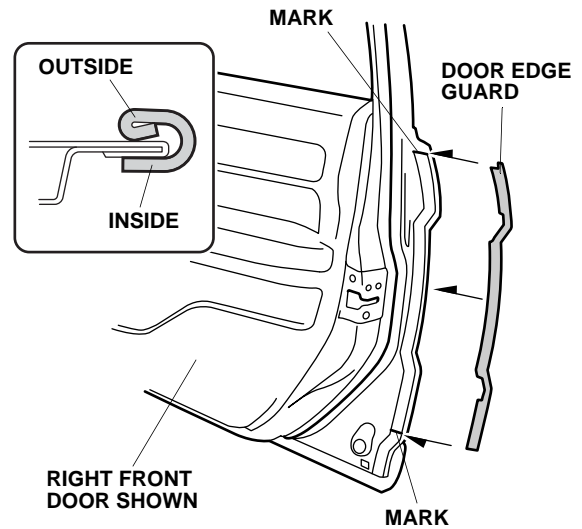

7. Repeat steps 3 thru 6 to install the left front door edge guard.



Rear Door Edge Guards

- Position the door edge guard against the inside edge of the rear door, using the bends for reference. Mark the sealant at the top and bottom ends of the door edge guard.

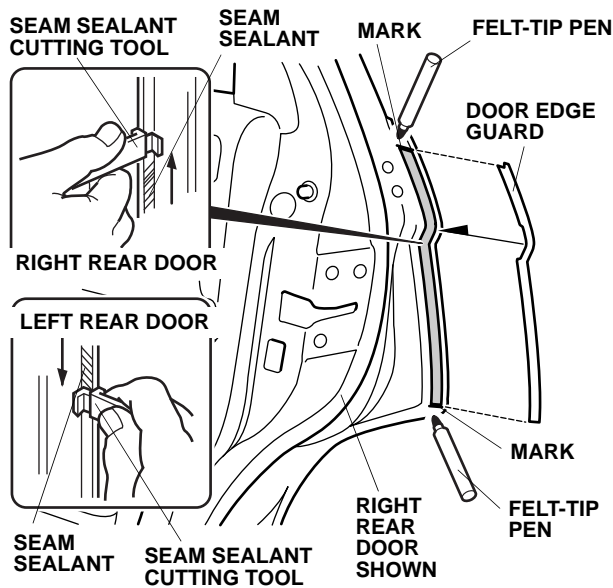

- Position the cutting edge of the seam sealant cutting tool against the door edge, and trim the seam sealant from mark to mark.
NOTE: The cutting tool only cuts in one direction. Move it upward on the right side, and downward on the left side of the vehicle.
- Apply touch-up paint to the cut seam sealant area, and let it dry.

- Position the door edge guard on the door edge, and tap it into position with a series of light taps using a rubber mallet.

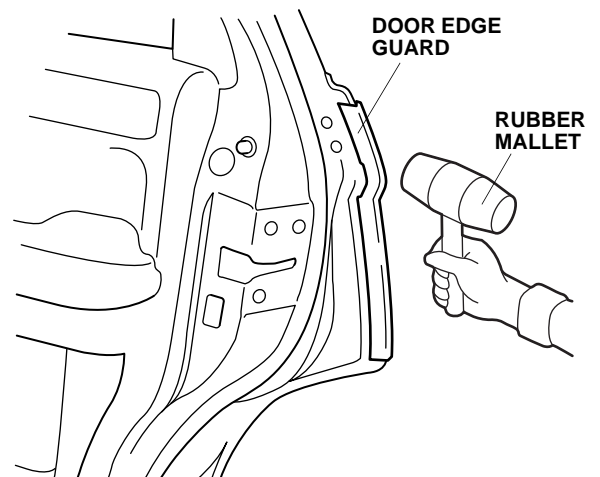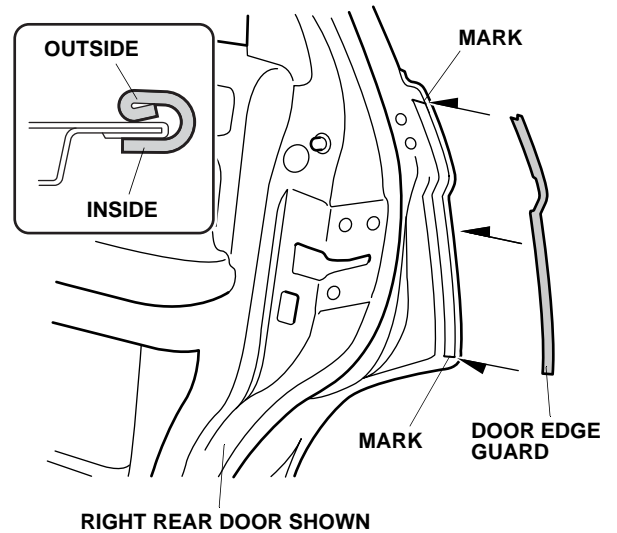

- Repeat steps 8 thru 11 to install the left rear door edge guard.